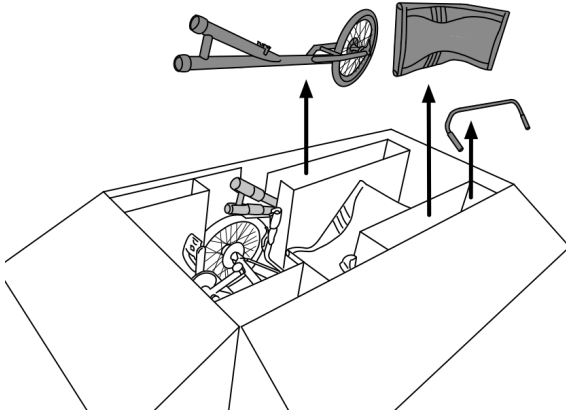



# TANDEM PRO SET UP GUIDE

**1**

Remove rear frame section, seat and handlebar from side inserts of box. Remove the front frame section.


**2**

Attach front and rear frame sections. Align coupler teeth and turn couplers counter clockwise to tighten.

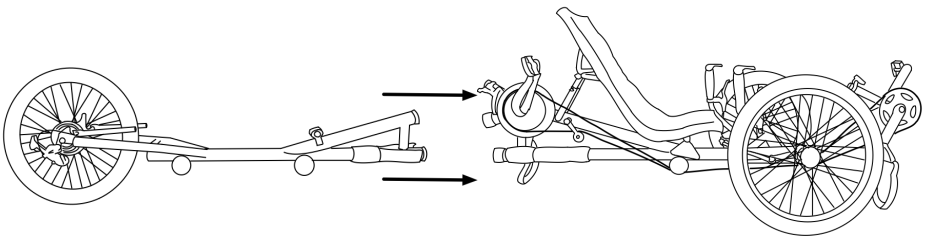


3

Use coupler wrench to ensure couplers are snug.

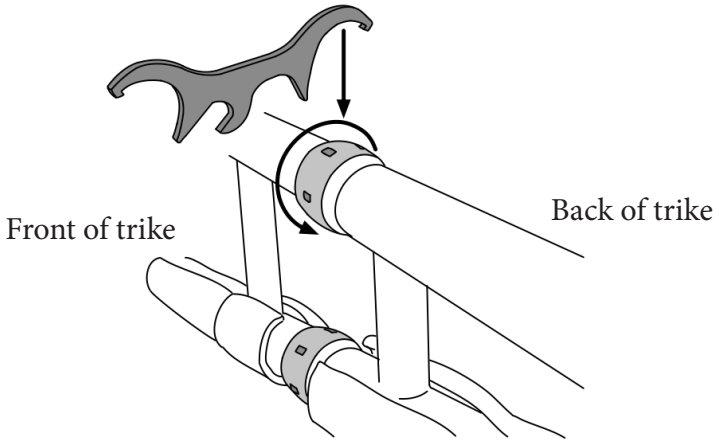


4

Attach shift cable separator. Please note, you may need to cut zip ties and remove foam before doing so.

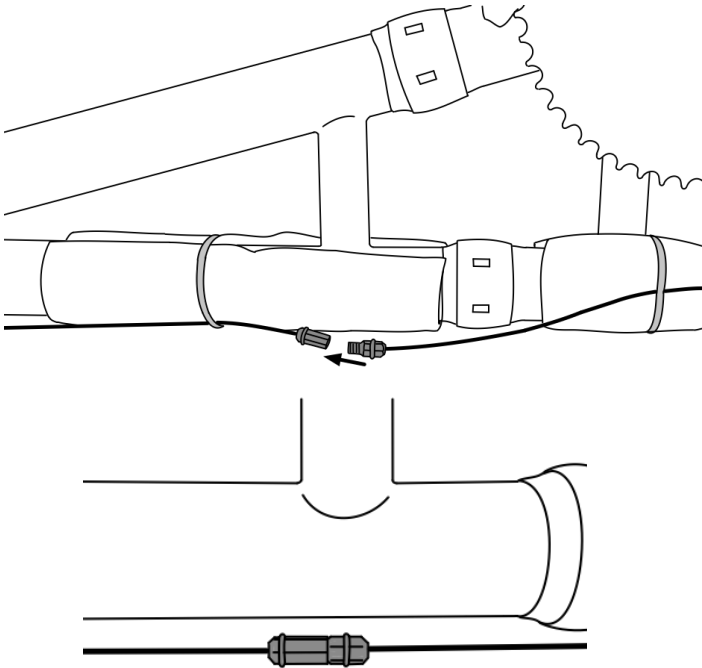


**5**

Route rear chain as shown below. (Red indicates drive chain, blue indicates return chain).

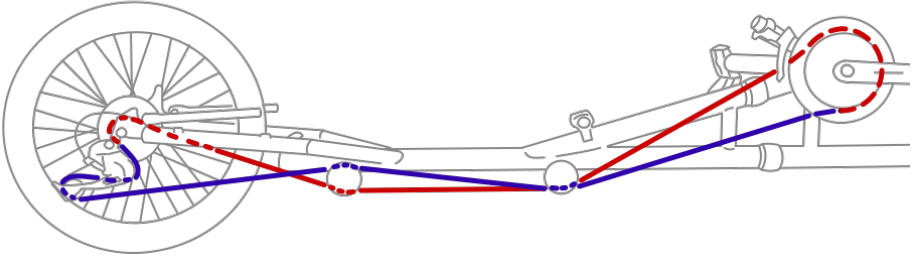


Top view of chain routing:

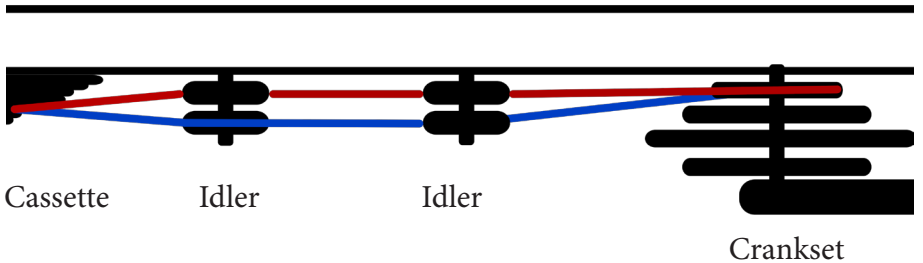


**6**

Install rear seat using the M8x70 bolt and M8 nyloc nut. Use x-seam measurement to determine which mounting hole combination is appropriate for you. (Please refer to [www.terratrike.com/sizing](http://www.terratrike.com/sizing) for how to measure x-seam). Insert bolt and tighten to 10-12Nm.

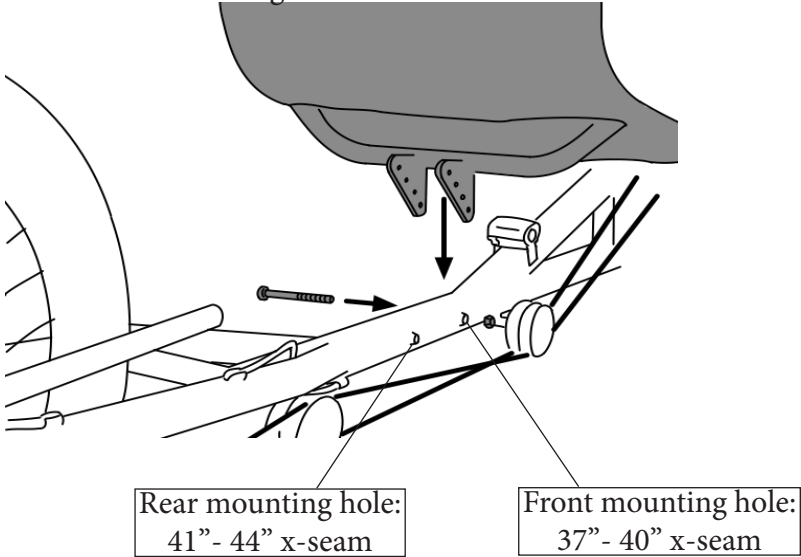
**7**

Attach upper and lower seat stays. Set at desired angle and install locking seat stay pins.

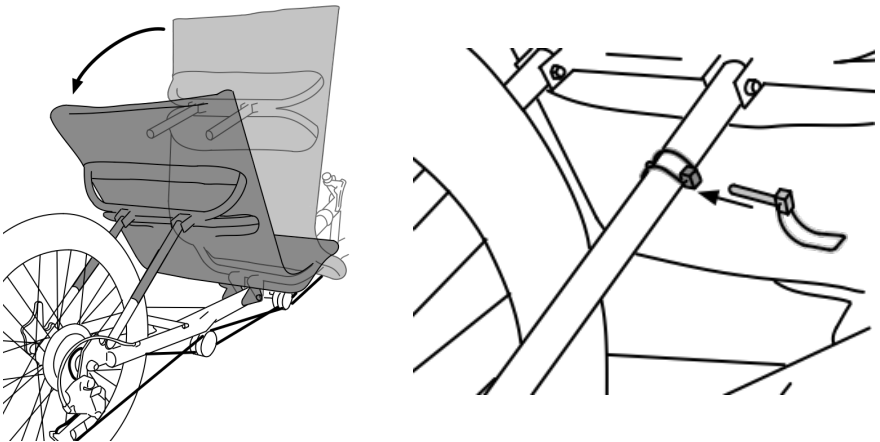


**8**

Install rear handlebar using the handlebar top cap and M5 top cap bolts. Tighten bolts to 3-4 Nm.

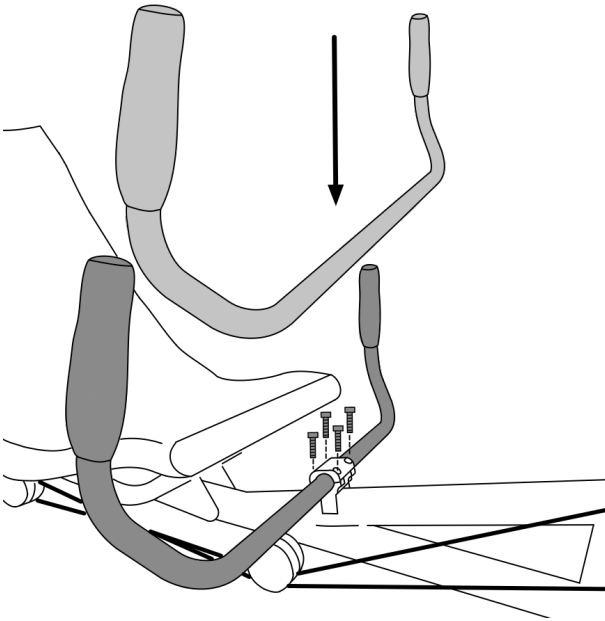

Enjoy your Tandem Pro!

Share your trike adventures on social media using the hashtag  
#myTTadventure

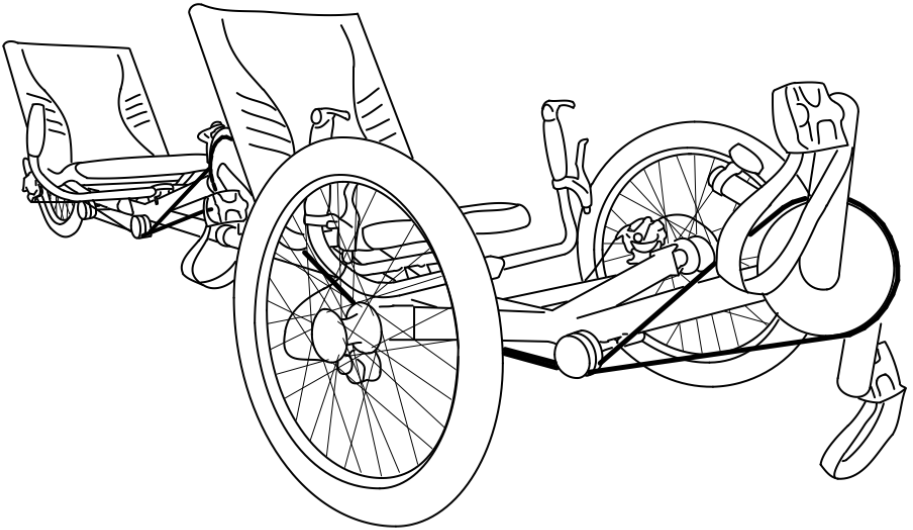



4460 40th St. SE | Grand Rapids, MI 49512

800.945.9910 | [www.TerraTrike.com](http://www.TerraTrike.com)