



TerraTrike®

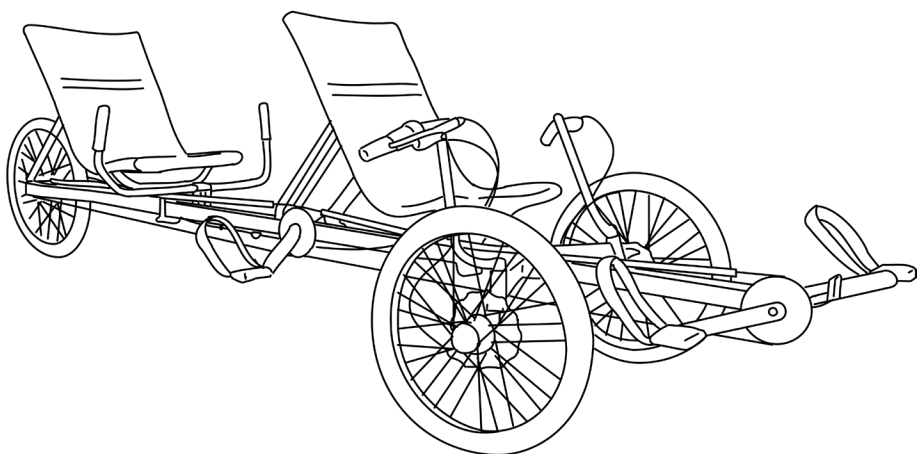

Rover Tandem Unboxing Guide

TOOLS



or



15mm



4mm



NOTES


- Inspect trike and any other contents.
- If damage is found, take clear photos of item and surrounding packaging then contact TerraTrike Customer Service.
- Cut only white zip ties when removing packaging.
- Save all packaging.



Nm(newton-meters) and **ft-lb**(foot-pounds) are torque specifications for tightening components. TerraTrike provides torque recommendations where applicable to aid in the building process.



1

Cut white zip ties from wheel and remove rear frame section.

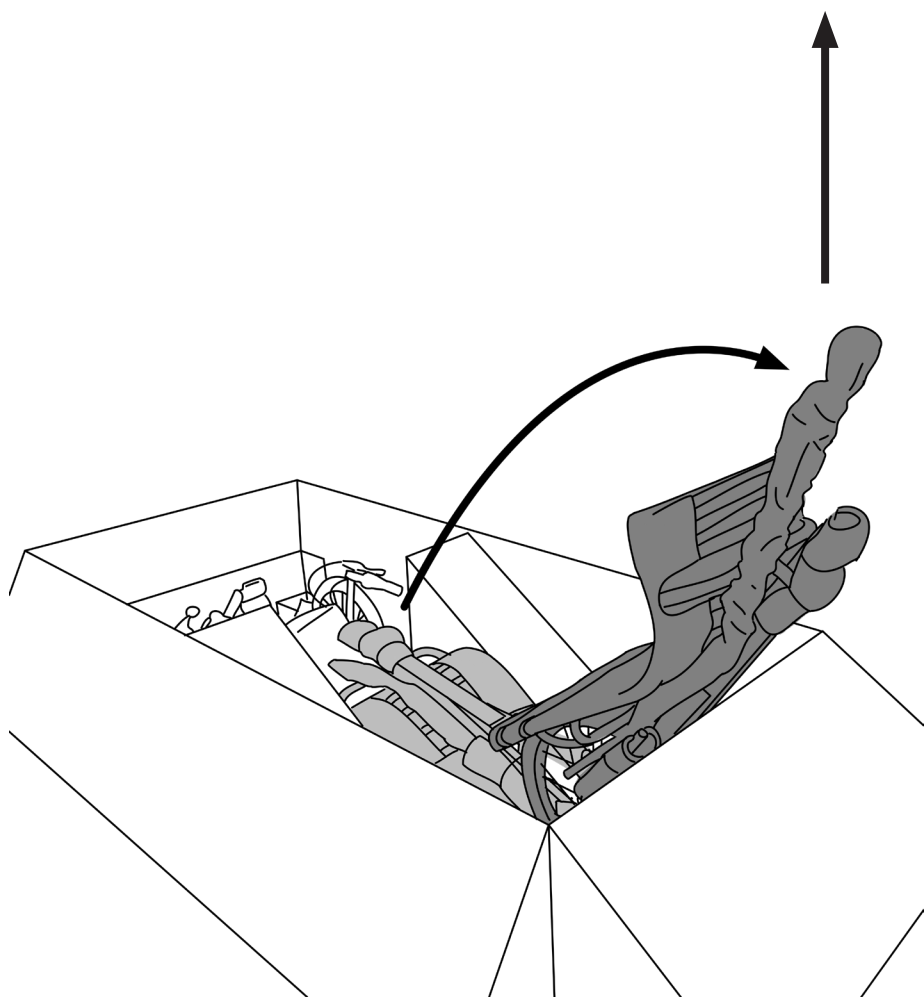

2



Remove front inserts, and rotate ramp inserts.

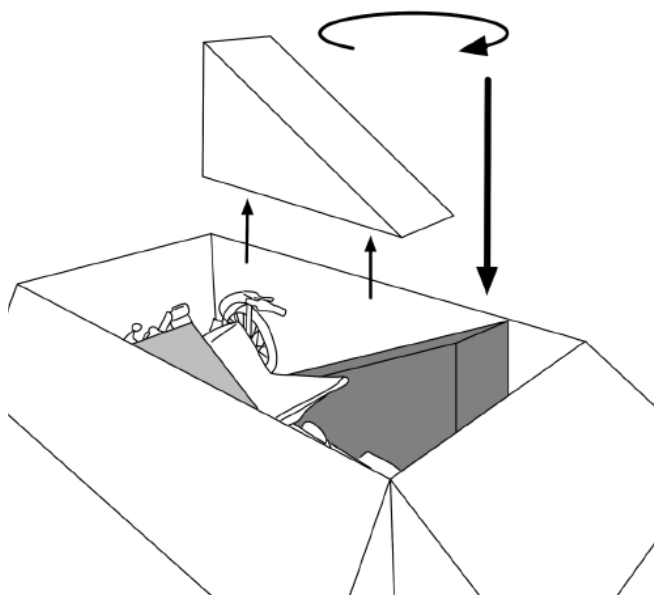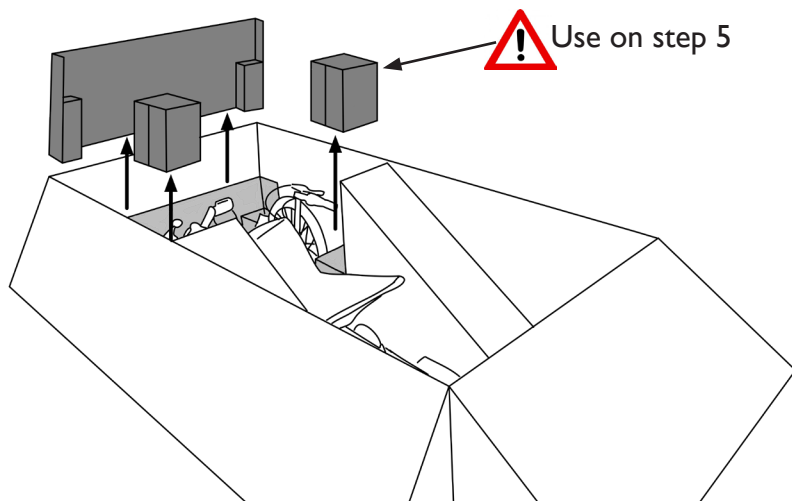

3



Release brakes.

Roll front frame section up and out.

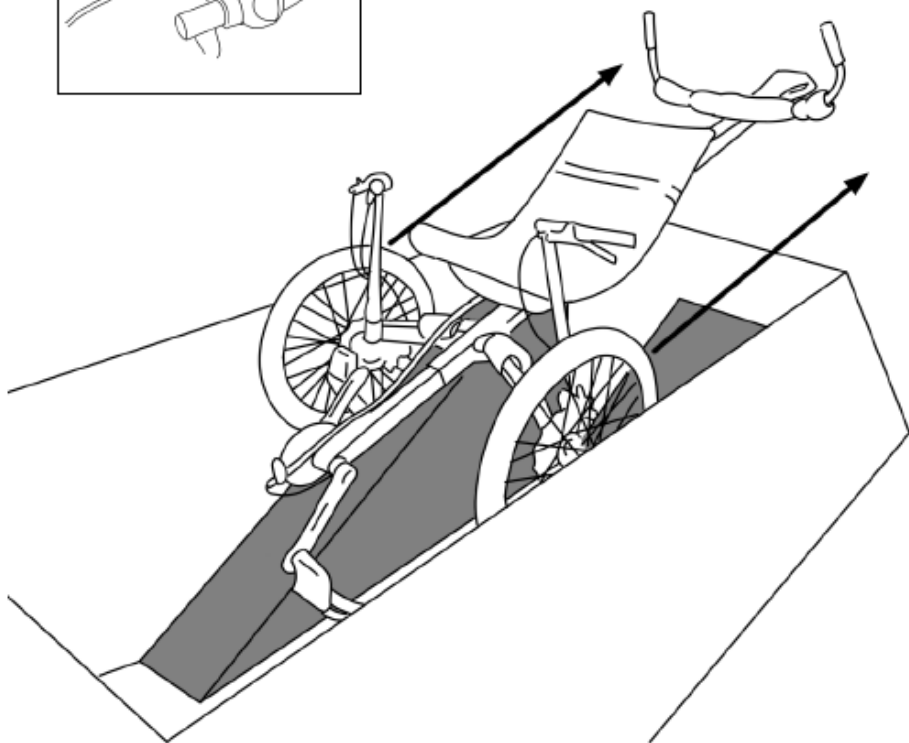


4

Lock brakes, prop up front frame section.

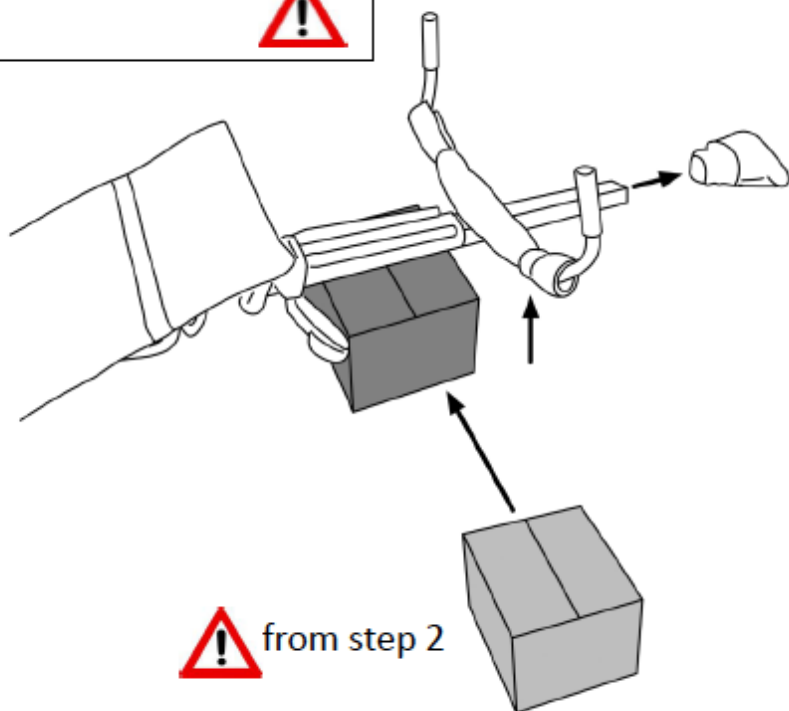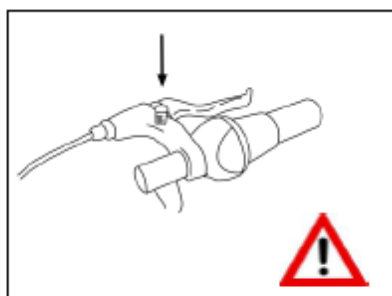




5

Attach rear frame section.

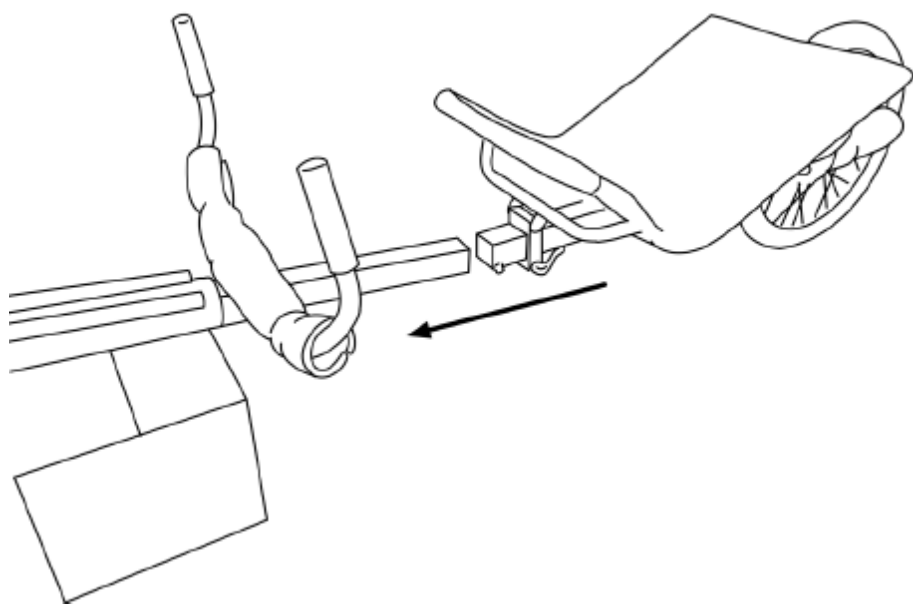


6

Secure rear frame section.

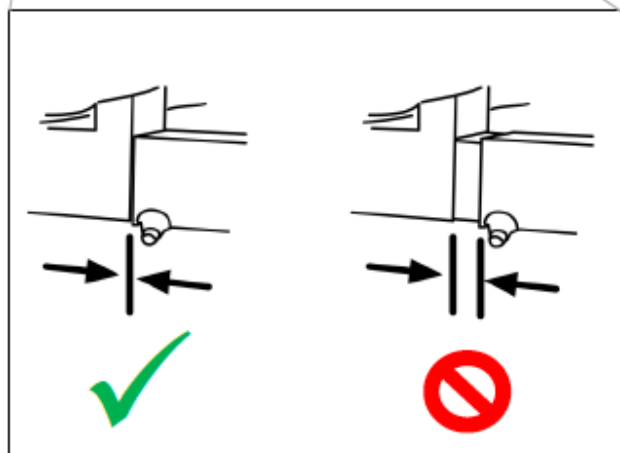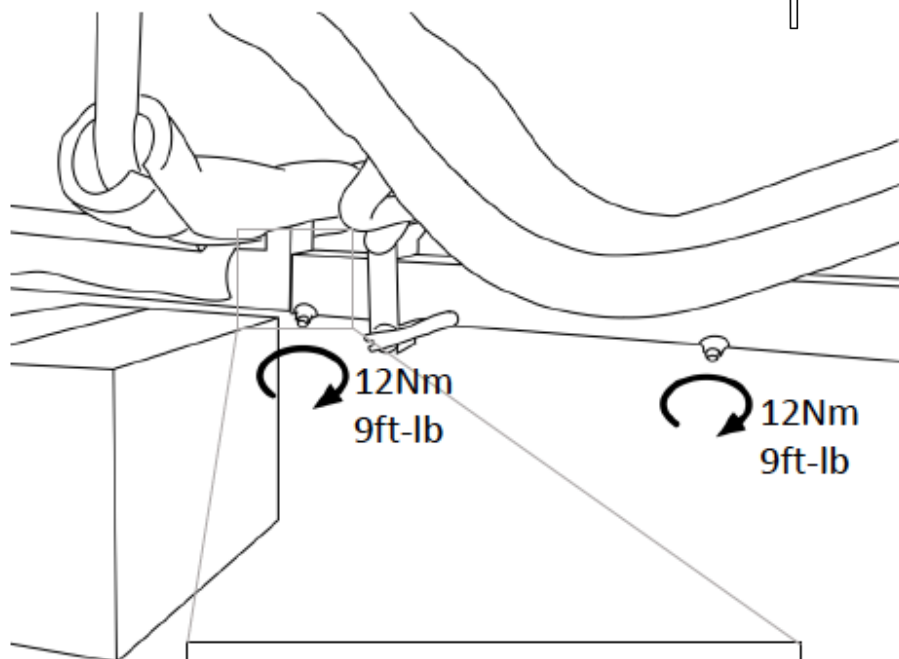



7

Raise seats and rotate reflector.

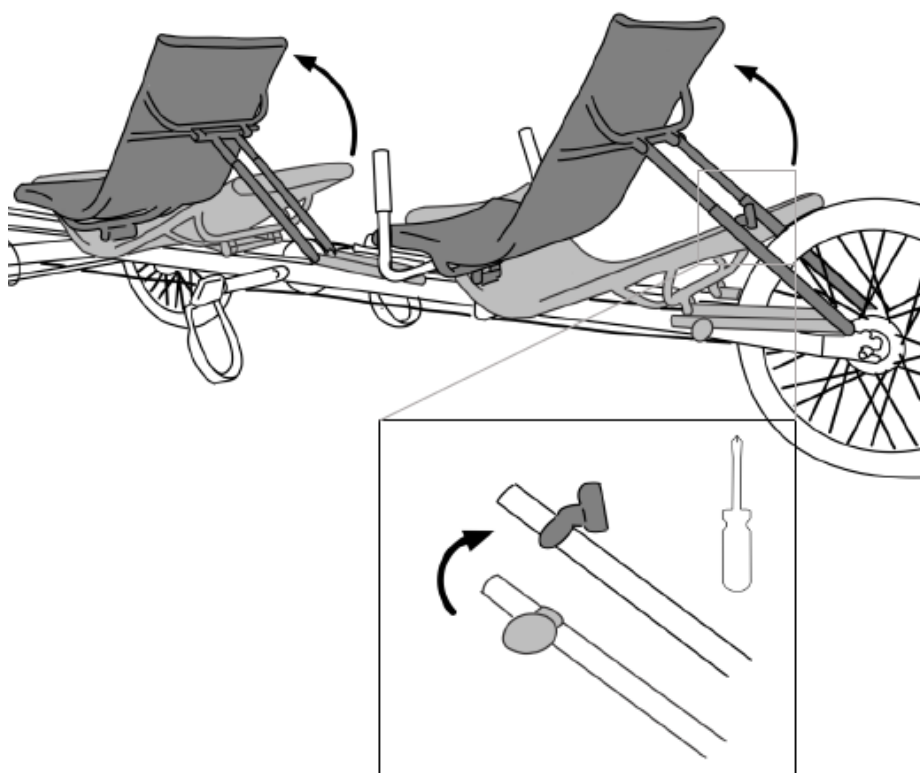


8

Loosen front set screw.

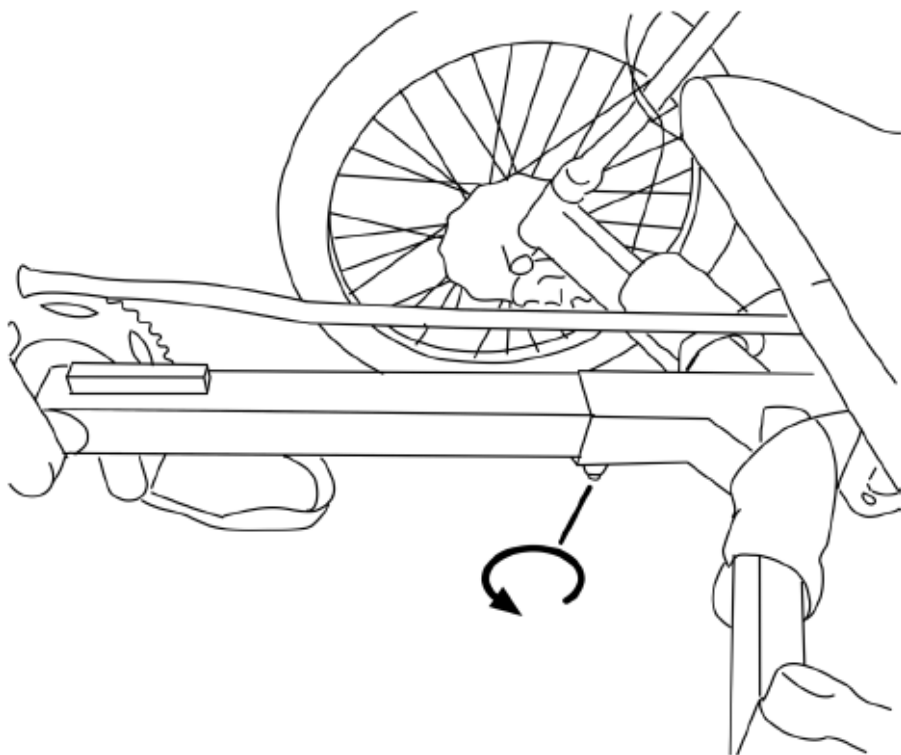


9

Attach chain and tension with boom.

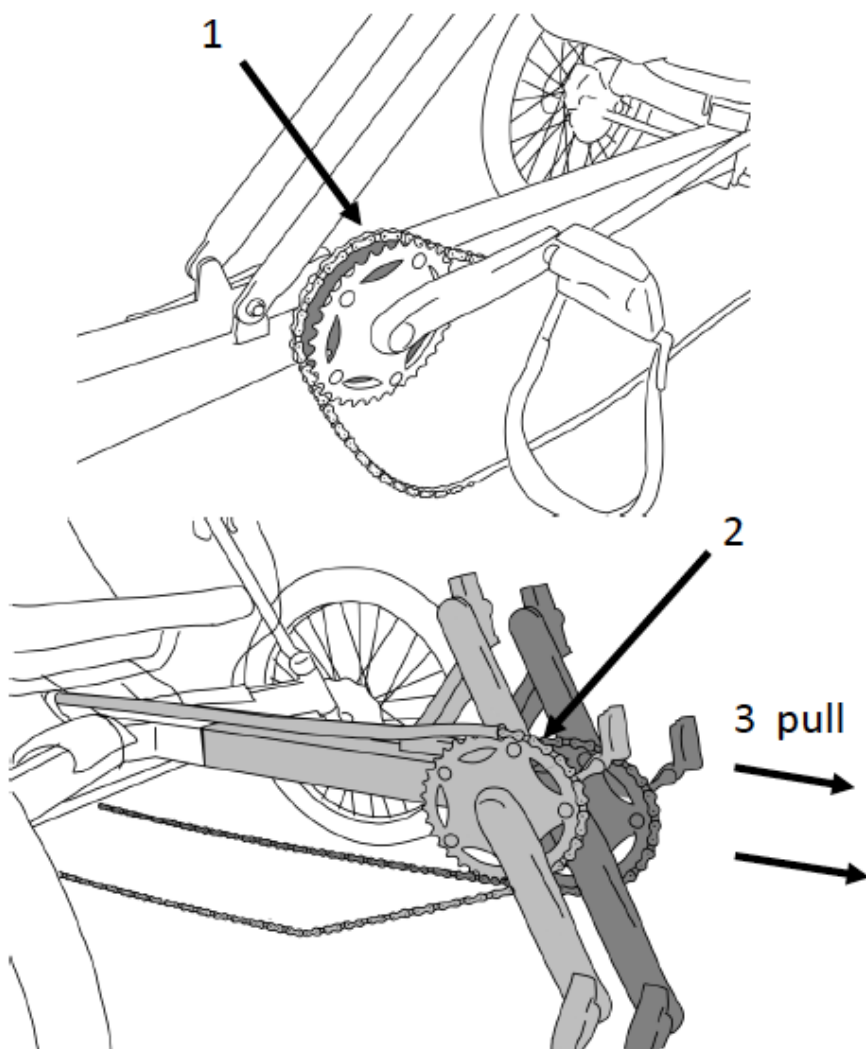


10

Tighten 4 remaining set screws.

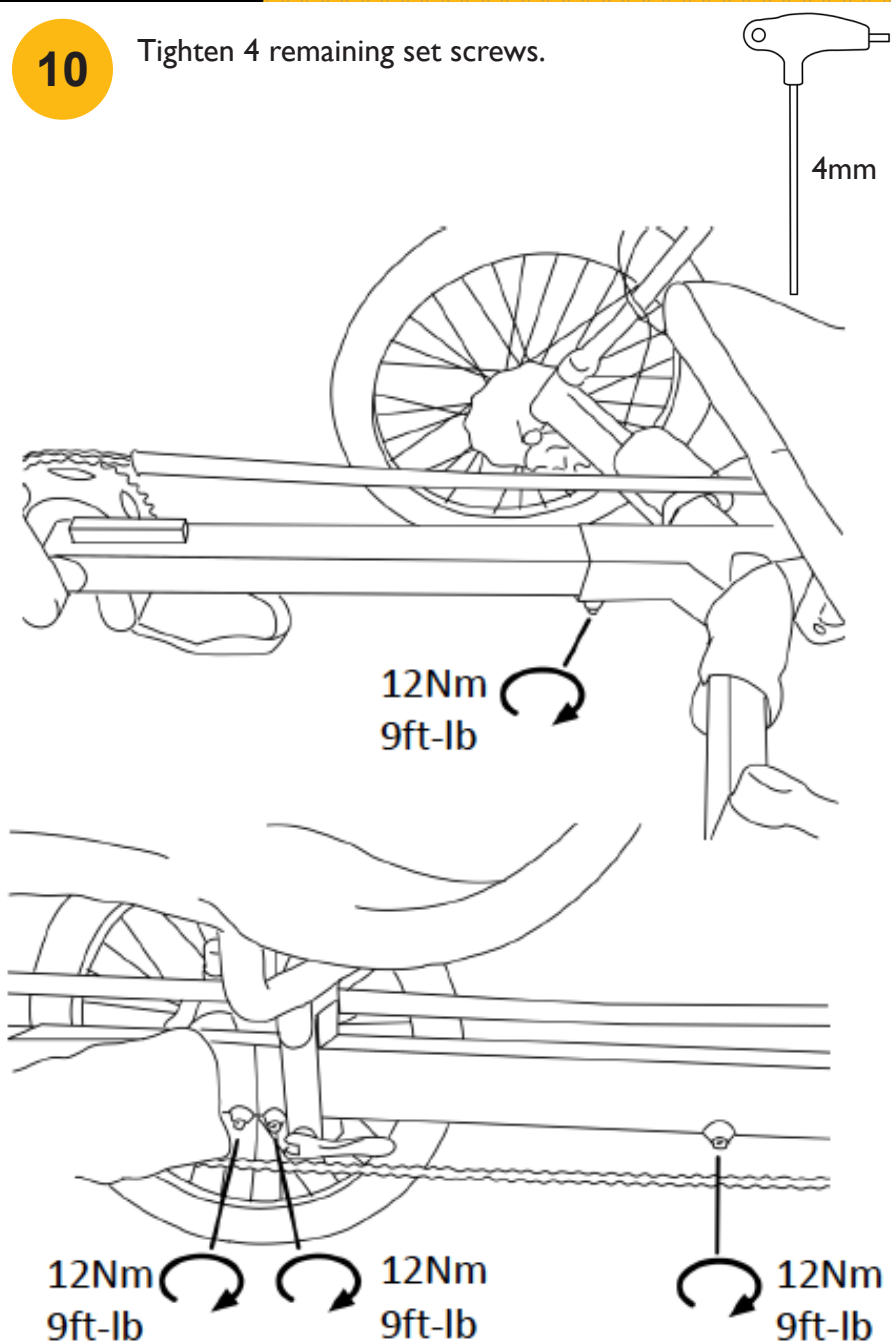



11

Remove remaining packaging.
Place cable housing in guides.
Attach shift cables.

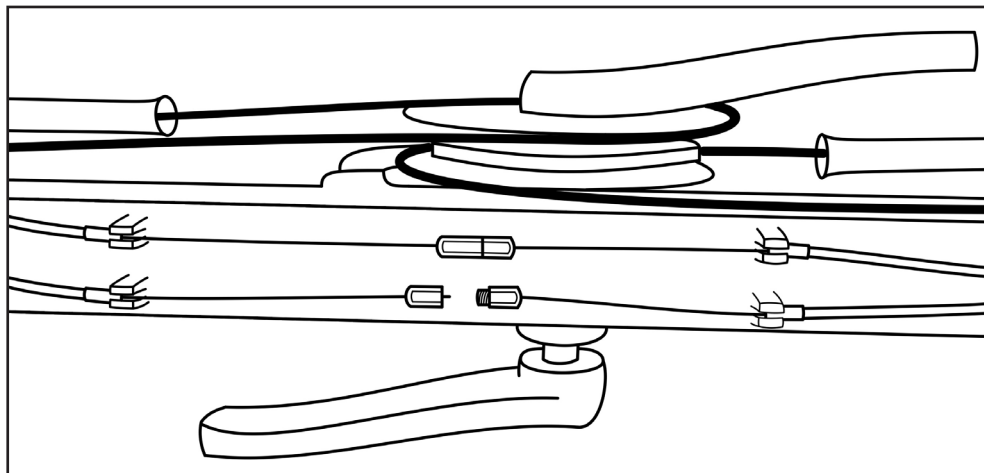


12

Attach rear chain.

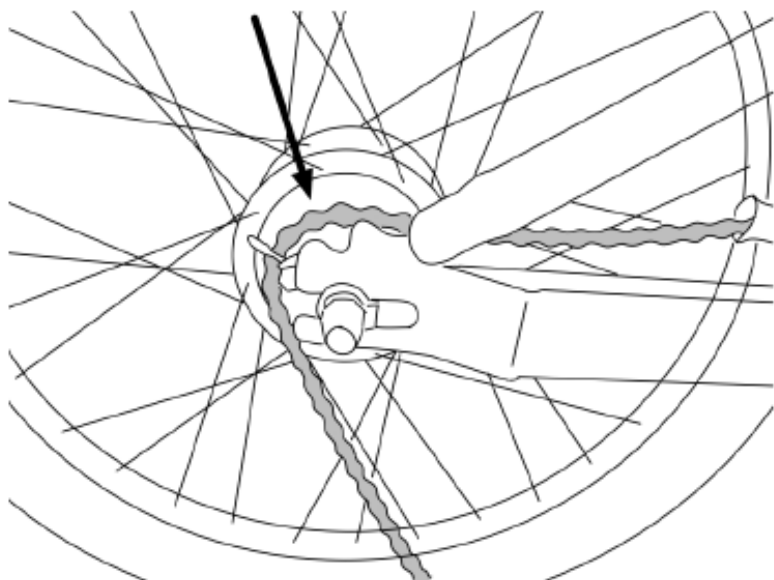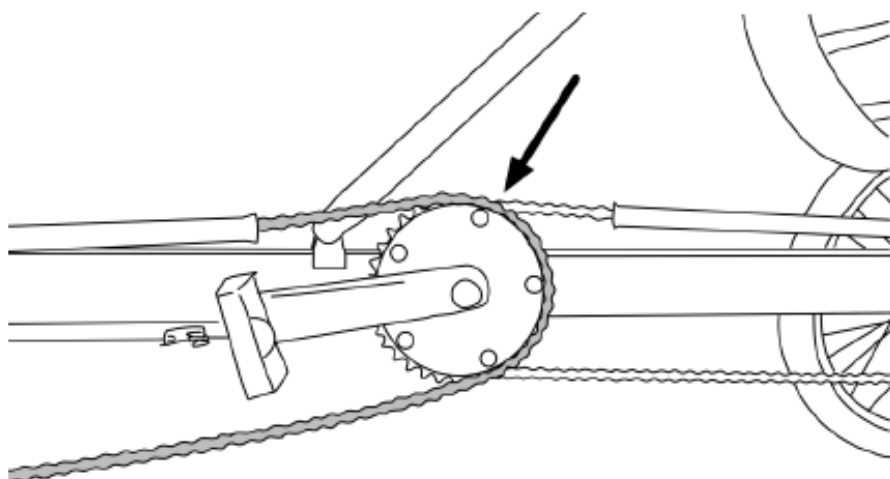


13

Tension the rear chain.

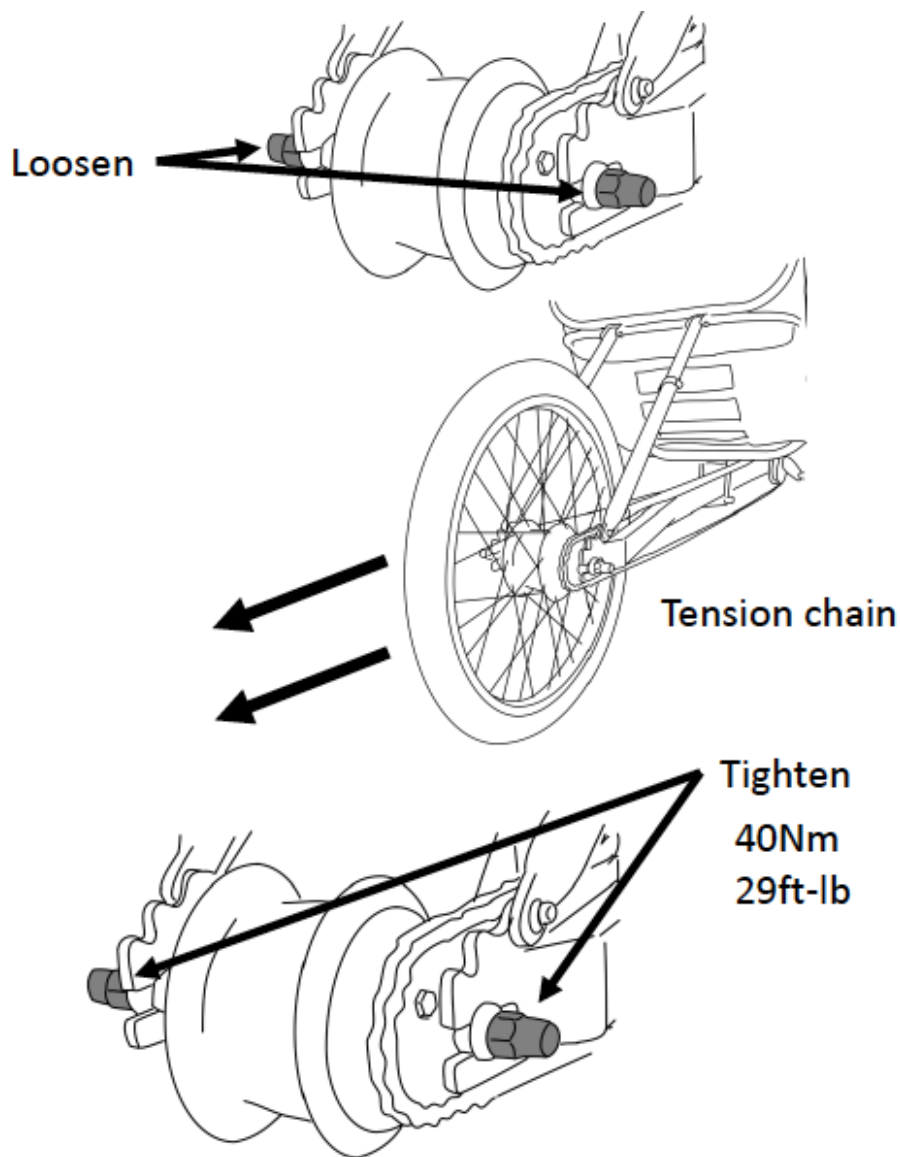

14

Adjust handlebars and seats per manual.
Test shifting and brakes.
Enjoy your Rover Tandem!

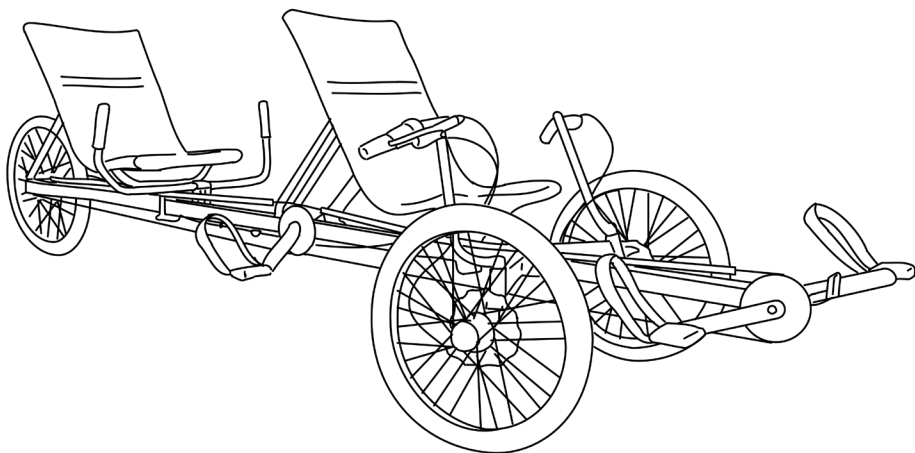

Visit TerraTrike.com for accessories to customize your ride.

***TerraTrike®***